

□□□□□□□□

□□□□

# Cheef/雪菲



喷码机 2015/12/17

**Cheef/雪菲**



**Cheef/雪菲**



Product features:

1:small volume, body weight 2.6Kg sprinkler ultralight.

2:and character height any regulation 5MM-60MM interval any

regulation (16 points Word high highest 60MM; 32 points Word high highest 126mm)

color: black and white blue red yellow

3 and pinyin input, operation convenient

4 and with cleaning function, ink bags package ink can in any when more into cleaning liquid bags, and left has row ink interface, can instantaneous will nozzle and ink tube in of ink discharge, and makes of full cleaning liquid, guarantee next normal using, nozzle never jam,

not dry.

5, gas-liquid separator, ensure pump gas is not clogged with ink

6, four-wheeled design, jet plane, curved surface, wall, any irregular surfaces, such as

7, adjustable track width, to cards of varying thickness, pipe diameter pipe

8, 4.3-inch color LCD screen, human

**Print Parameter:**

Spray Printing font size and the line number:

7 points array: height 10-24mm interval any regulation, width any regulation  
can spray printing line digital or English

16 points array: height 10-60mm interval any regulation, width any regulation  
can spray printing line characters and double line digital or English software

function: real-time date clock, and print batch, and remember number, and shifts

font upper and lower Britain, and around flip spray printing graphics: can spray

printing trademark graphics, and symbol, date code: support century, and years,  
and months, and day, and Shi, and points, and seconds

print speed: Manual control of the print

distance: from the printing surface: 8mm

State displayed: print Shi red indicates lamp bright screen

displayed: displayed all print parameter, at a glance, a key change set triggered

way: photoelectric induction device triggered spray printing control: coding

device control spray

printing direction: 360 degrees can spray

spray printing material: permeability or non-penetration material are can using ink: water ink (permeability surface) or oily ink (non-permeability)

ink color: black, and red, and blue, and yellow, and white, can selected for ink

way: built-in pump suppressed

gas source pressure: 0.01-0.06Mp can adjustable

power parameter: DC24V, 1.5A, average power consumption is less than 30W





charging time: less than 3 hours

Using the environment: temperature:-20-70 degrees and humidity 30%-70%

cable length: 1.8 m (can be customized upon request)

weight: approximately 3Kg machine size: 205\*130\*110mm machine

appearance: stainless steel body, wear-resistant and durable

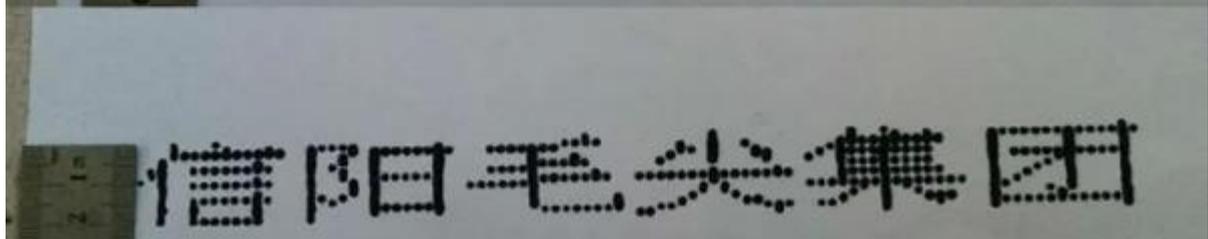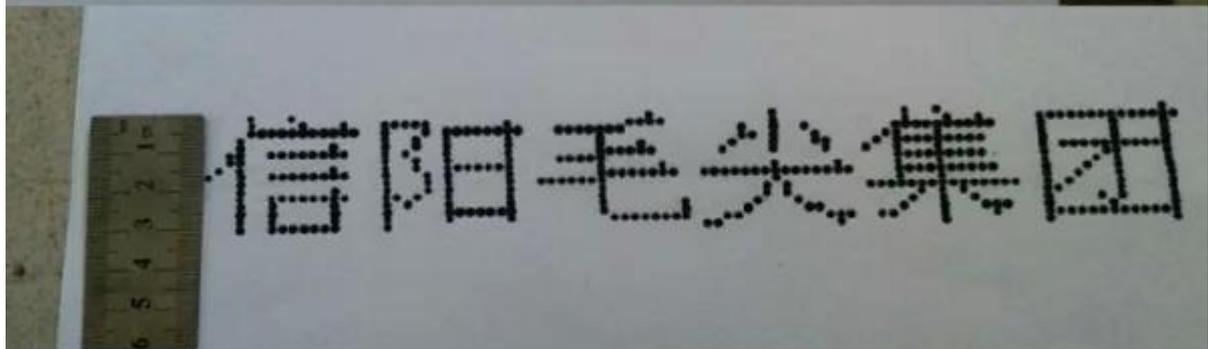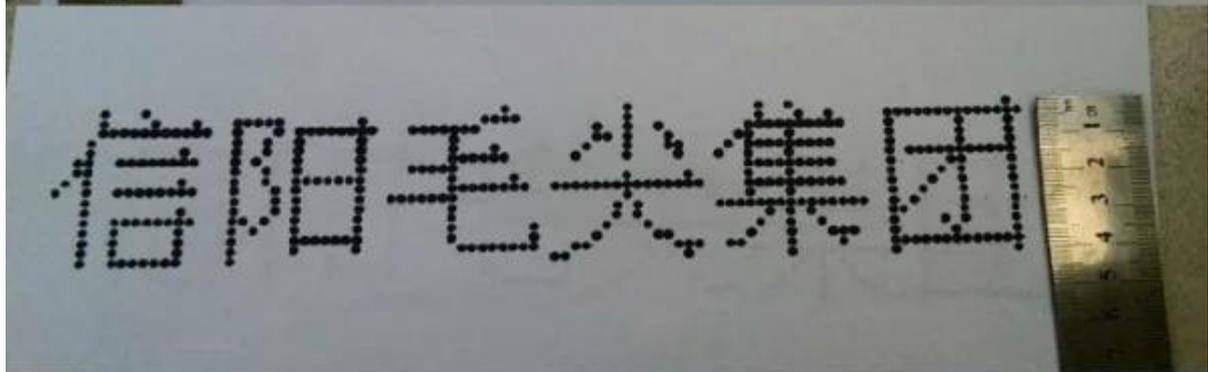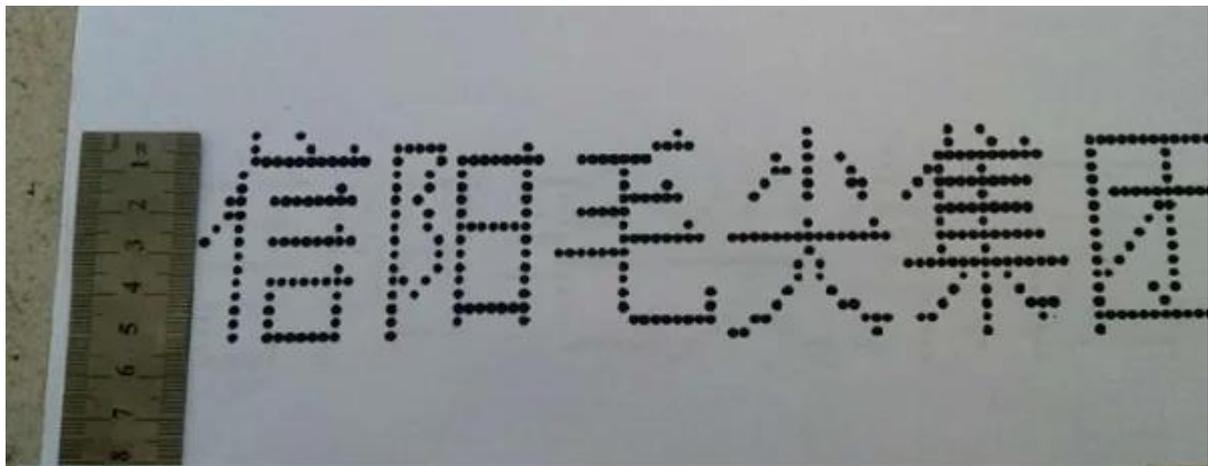

□□□□□□

□□□□□□□□□□□□□□, □□ "□□□□!"